

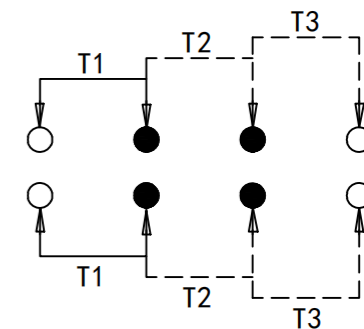
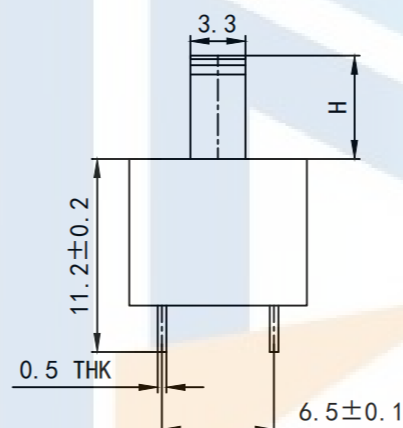
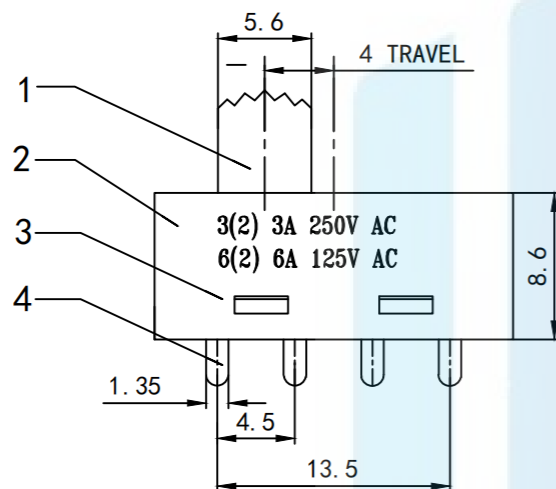


RoHS2.0
Compliant

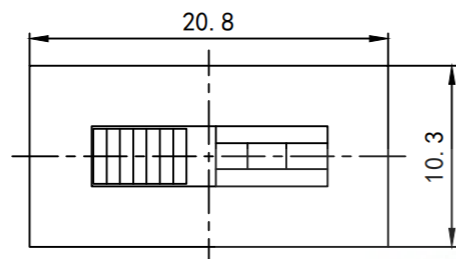

SCHEMATIC (NON-SHORTING)



P.C.B LAYOUT
BOTTOM VIEW


Electrical performance parameters:

1. Rated load : AC125V 3A
2. Contact resistance: less than 100 milliohm
3. Insulation resistance : 100 megohm to _
4. Endurance life pressure : AC 500V
5. degrees : 350 ° 100gf
6. Life : 5000 times
7. Wave peak welding : 255 degrees 5

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨动开关

PART NO: SS-23H20胶壳

DRAWING NO: 20.8*10.3*H

DRAWN:

DATE:

18-10-08

UNIT: mm

CHECKED:

DATE:

18-10-08

SCALE: FULL

APPROVED:

DATE:

18-10-08

SIZE: A4