
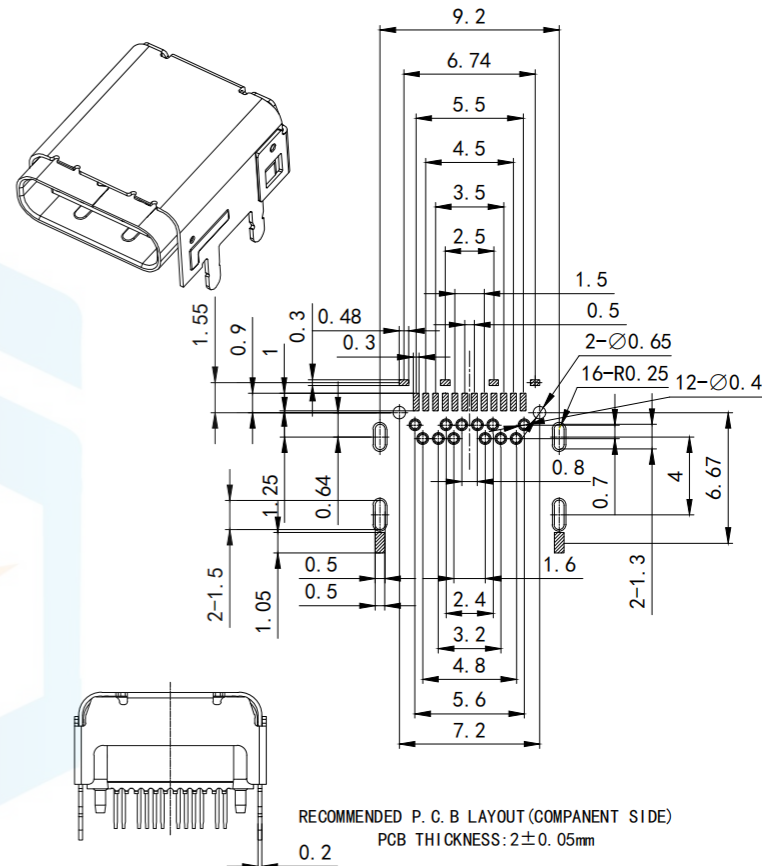
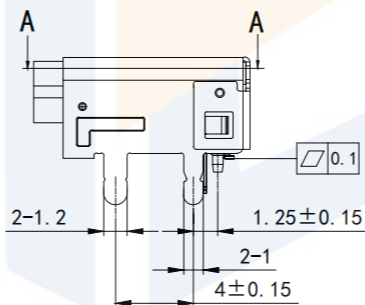
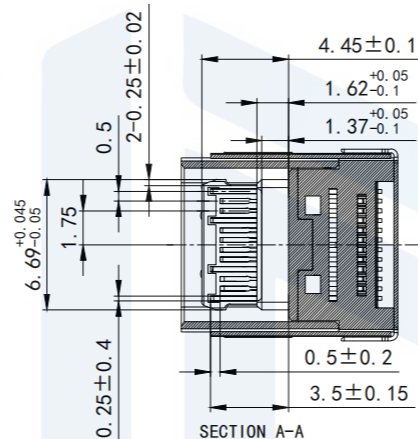
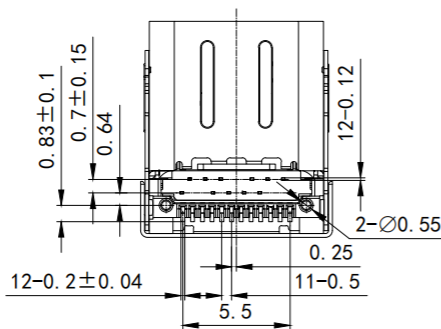
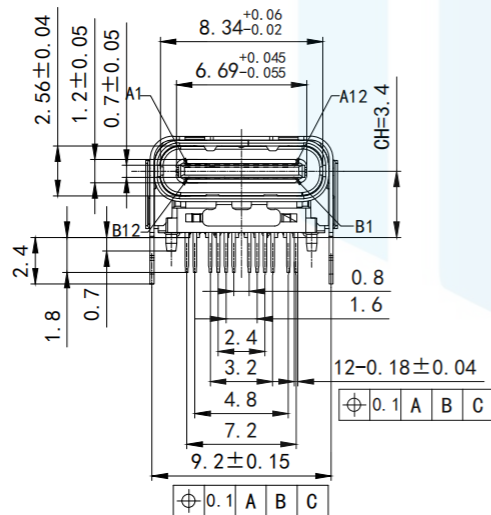


RoHS2.0
Compliant

Pin NO	Signal Name	Mating Sequence	Pin NO	Signal Name	Mating Sequence
A1	GND	First	B12	First	First
A2	TX1+	Second	B11	RX2+	Second
A3	TX1-	Second	B10	RX2-	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU1	Second
A6	D+	Second	B7	D+	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC1	Second
A9	VBUS	First	B4	VBUS	First
A10	RX2-	Second	B3	TX1-	Second
A11	RX2+	Second	B2	TX1+	Second
A12	GND	First	B1	GND	First
SHELL	GND	First	SHELL	GND	First

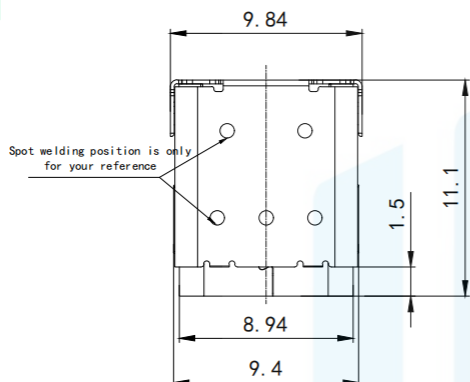


- NOTES:
1. MATERIAL :SEE TABLE
 2. COPLANARITY : 0.10 Max.
 3. ELECTRICAL CHARACTERISTICS
CONTACT RESISTANCE: 40mΩ Max
INSULATION RESISTANCE: 100MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE: 100VAG
CONTACT CURRENT RATING: SA Max
 4. MECHANICAL CHARACTERISTICS
INSERTION FORCE: 5~20MEXTRACTION FORCE: 8~20N
AFTER DURATION EXTRACTION FORCE: 6~20N
 5. DURABILITY: 10000 CYCLES
 6. PACKAGING TYPE: CARRIER TAPE
 7. SALT SPRAY : 24 HOURS

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTION



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

TYPE C 24P板上双壳加高型
CL=3.40短路款前插后贴

PART NO: TYPE-C24P-BS034

DRAWING NO: 11.1*8.94*2.56

DRAWN:

CHECKED:

APPROVED:

DATE:

18-10-08

UNIT: mm

DATE:

18-10-08

SCALE: FULL

DATE:

18-10-08

SIZE: A4